



**HIGHER WORKING PRESSURE  
SIMPLIFIED INVENTORY REQUIREMENTS  
TIGHTER BEND RADIUS**



**M2T<sup>®</sup>  
MEGAFLEX<sup>®</sup>**

**WIRE-BRAID HOSE**



**SAVES OVERALL HOSE  
ASSEMBLY LENGTH**



**FACILITATES EASIER ROUTING  
IN TIGHT APPLICATIONS**



**REQUIRES FEWER BENT TUBE FITTINGS**



**TESTED + PERFORMS AT: 133% WORKING PRESSURE  
600,000 CYCLES**



**REDUCES COSTS BY AS MUCH AS 60%**

This hose is ideal for high-pressure hydraulic applications on mobile equipment used in agriculture, construction, mining and other industries as well as in stationary equipment in industrial and MRO operations.

- > Tighter bend radius for easier routing
- > Longer life in demanding impulse and bending applications
- > Co-extruded dual-line option reduces bulk and eliminates extra materials and inefficient assembly
- > Simplifies inventory requirements to save space and money

## Up to One-Third Bend Radius Specification

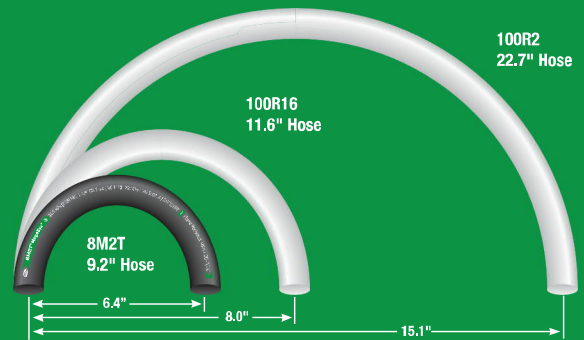






Illustration of 8M2T hose flexibility and reduced hose length requirements

	M2T		DUAL LINE M2T	
				
<b>PERFORMANCE SPECIFICATIONS</b> <i>MegaSys hoses exceed industry standards.</i>	SAE	100R16 100R2	SAE	100R16
	ISO	11237 2SC R16 1436 2SN R2	ISO	
	EN	857 2SC 853 2SN	EN	
<b>REINFORCEMENT</b>	2 BRAID		2 BRAID	
<b>COVERS</b>	STANDARD XTRATUFF® MEGATUFF®		XTRATUFF	
<b>TEMPERATURE RANGE</b>	-40° TO 212°F (-40° TO 100°C)		-40° TO 212°F (-40° TO 100°C)	
<b>COUPLING</b>	MEGACRIMP® GLOBALSPIRAL™ STAINLESS STEEL		MEGACRIMP GLOBALSPIRAL	
<b>MSHA RATED</b>				

### Gates Australia Pty Ltd

1-15 Hydrive Close, Dandenong South, Victoria, 3175

PH: +61 3 9797 9666 FAX: +61 3 9797 9600

[www.GatesAustralia.com.au](http://www.GatesAustralia.com.au)



35060-M2T (Ind)

428-2022 (Auto)

7/2015